
TRACTOR-TOWED SCRAPER





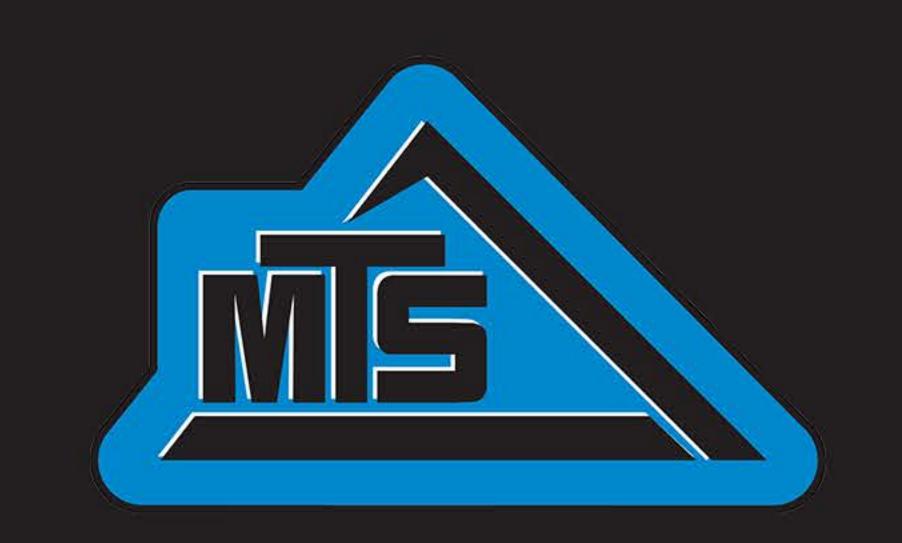


MOBILE TRACK SOLUTIONS

A young company with a long history.







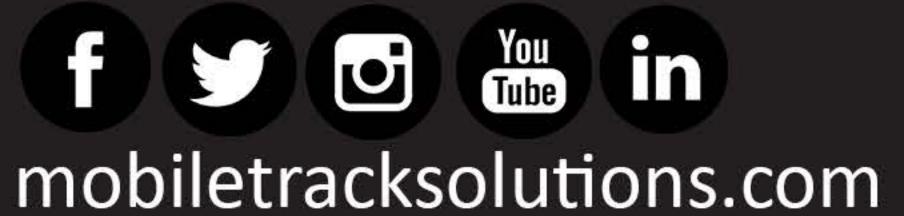

Elkader, IA (563) 245-6871

SPECIFICATIONS EL



SCRAPER BOWL		
ISO Capacity	23.7 yd³	18.1 m³
Rated Load	70,000 lbs	32,000 kg
ISO Capacity - Sideracks	26.4 yd³	20.2 m ³
ISO Capacity - Sideracks & Apron SG	28.2 yd³	21.6 m ³
Width of Cut, To Router Bits	135.5 in	3,441 mm
Capacity Struck	12.6 yd³	9.6 m³
Max Depth of Cut	6.75 in	171 mm
Ground Clearance @ CE	25.5 in	648 mm
Apron Opening	69 in	1,753 mm

	DIMENSIONS		
	Width (Inside of Bowl)	132 in	3,353 mm
1	Width (Outside Rear Tires)	131 in	3,327 mm
2	Width (Outside Bowl)	144 in	3,658 mm
	Height (Floor to top of Ejector)	69 in	1,753 mm
	Height (Sidewall)	36 in	914 mm
	Length (Floor)	72 in	1,829 mm
5	Push Block to Axle	76 in	1,930 mm
6	Axle to Cutting Edge	140 in	3,556 mm
7	Cutting Edge to Hitch	234 in	5,943 mm
	Maximum Load Rating	70,000 lbs	32,000 kg

	Shipping Modifications		
3	Height (Overall Shipping)	101 in	2,565 mm
2	Width (Overall Shipping)	144 in	3,658 mm
4	Length (Overall Shipping)	450 in	11,430 mm
	Empty Weight	30,217 lbs	13,706 kg



WEIGHT DISTRIBUTION	
Distribution Empty (Tongue)	26%
Distribution Empty (Axle)	74%
Distribution Loaded (Tongue)	27%
Distribution Loaded (Axle)	73%

BRAKES & TIRES		
Brake Type	Dry Disk	
Caliper Quantity	2	
Operating Pressure of Brakes	500psi 3,447 kPa	
Tire Quantity	4	
Standard Tires	23.5R25	

HYDRAULICS		
Bowl Cylinder Bore	7 in	178 mm
Bowl Cylinder Stroke	17 in	432 mm
Apron Cylinder Bore	4.5 in	114 mm
Apron Cylinder Stroke	25.1 in	638 mm
Ejector Cylinder Bore	6 in	152 mm
Ejector Cylinder Stroke	76 in	1,930 mm

