


MT-12


ROLLERBLADE

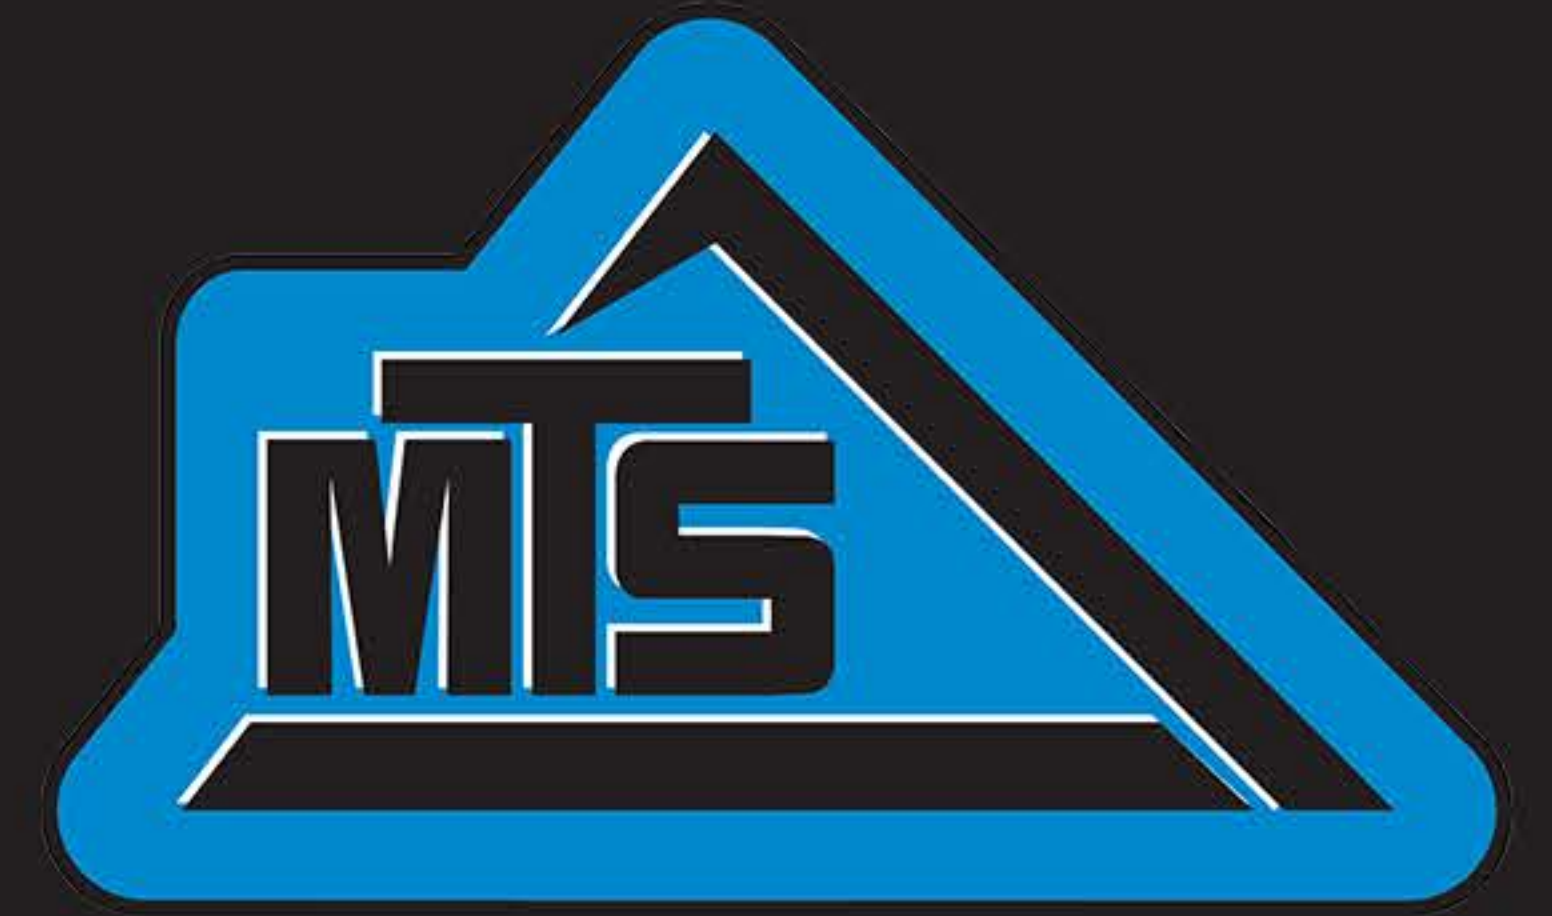

MOBILE TRACK SOLUTIONS

////////////////////// TRACK FORWARD ▶▶▶▶


A young company with a long history.

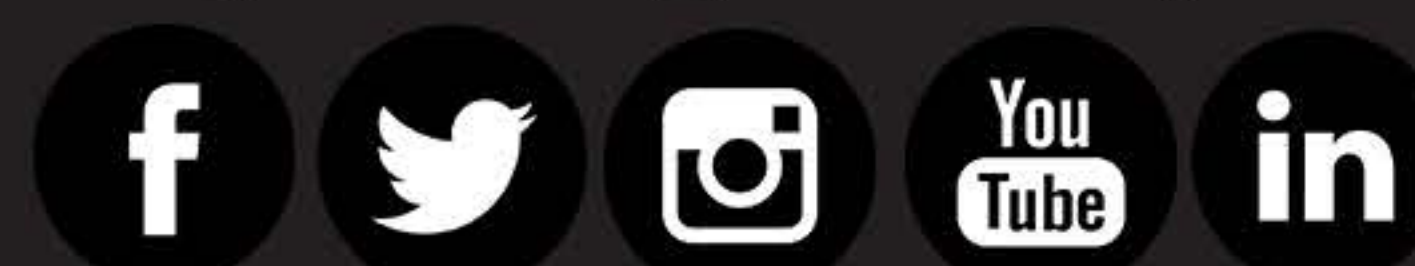

mobiletracksolutions.com

Elkader, IA
(563) 245-6871

MT-12 SPECIFICATIONS

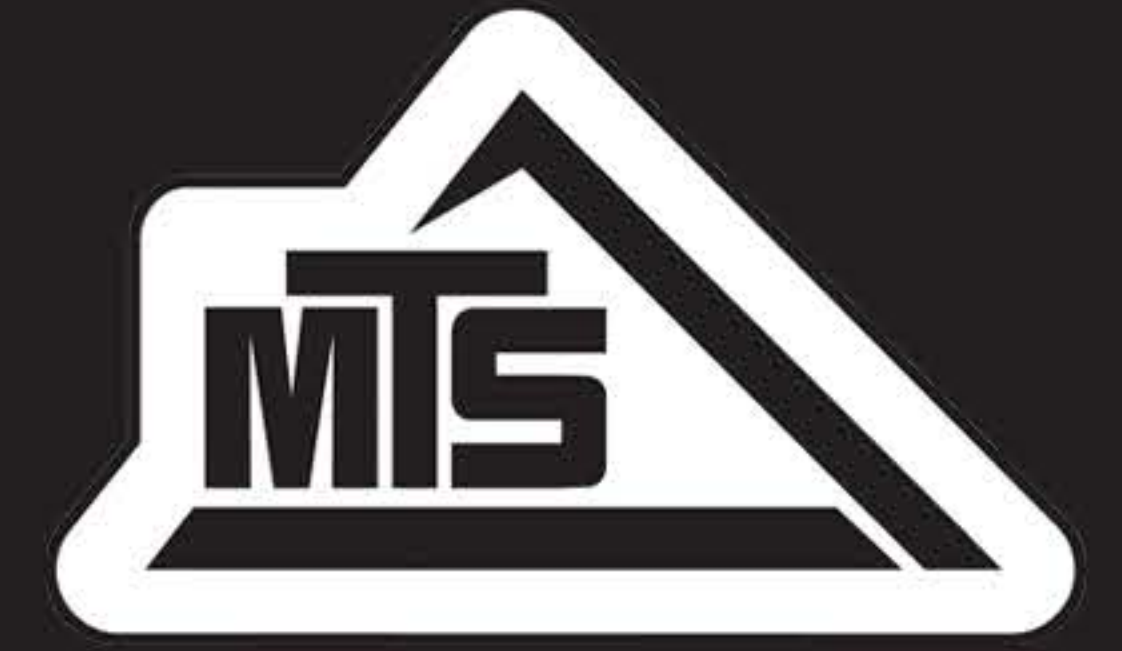

5 Overall Width	144 in	3,658 mm
4 Overall Length	250 in	6,350 mm
6 Overall Height	76 in	1,930 mm
3 Width (Inside of Tires)	89 in	2,261 mm
2 Width (Outside of Tires)	122 in	3,099 mm
Total Weight	12,450 lbs	5,647 kg
Recommended Pull Unit	Min 150 hp	Min 112 kw
Hydraulic Circuits Required	1	
1 Width of Drum	126 in	3,200 mm
Standard Tires	425 165 R22.5	
Minimum Hitch Pin Size	1.5 in	38 mm
Minimum Clevis Opening	4.6 in	117 mm
Max Operating Pressure	3000 psi	20,684 kPa

HYDRAULICS

- Pioneer® Quick Couplings, Poppet-style Fittings
- Caterpillar® XT-3ES ¾" 4,000 PSI Hydraulic Hose
- Two Construction Grade 4,000 PSI Cylinders
- Greaseable Spherical Bearings on Rod Ends

TONGUE ASSEMBLY

- Category 4 Pintle Hitch with 360° Rotation
- Gooseneck Design - Allows clearance for dirt to roll ahead

ROLLER DRUM ASSEMBLY

- Drum ¾" Rolled Steel
- Oil Bathed Bearings with Duo-Cone Seals
- Drum: 10.5' Wide, 42" in Diameter (3,200 mm Wide, 1,067 mm Diameter)
- End Cap in the Drum for Additional Ballast

ROLLER SCRAPER WELDMENT

- Hardox® 450 Steel Box Blade
- Standard Cat Cutting Edge (reversible)
- Cat Router Bits - used to protect side frame
- Greaseless Bushings throughout

